


TransWarp 9™

Motors

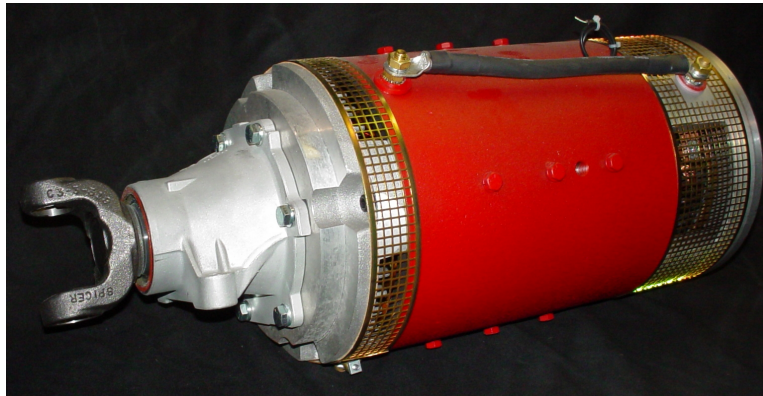

Standard Features

- 9.25" diameter, series wound DC motor
- Weight, approx. 160 pounds
- 32.3 HP (72 Volts, 335 Amps)*
- 70 Ft. pounds torque*
- 5,500 RPM's
- Developed for **EMIS** and direct drive applications
- Advanced timing – factory set for CCWDE (CWDE available)
- 1.125" keyed CE shaft (matches 00-08219 DE)
- Commutators key locked onto the shaft
- High quality, large style brushes, factory pre-sealed over 90%
- Exceeds Class "H" insulation – temperature snap switch + brush wear indicator
- Turbo 400, 32 tooth splined shaft
- Slip yoke assembly and tail shaft housing also available as options
- Delivery – from stock

* Dynamometer tested operating conditions

Manufactured Exclusively For:

NetGain Motors, Inc.

900 North State Street – Suite 101

Lockport, IL 60441

630-243-9100

go-ev.com

Available from:

TransWarp 9™

Motors

Description	Part	MSRP	Notes
CE Shaft, Advanced Timing	00-08309	\$2,275.00	
Diameter	9.25 inches		
Length	15.93 inches		
Weight	165 lbs.		
Drive Bearing	10222140	\$14.63	(sub 6207 2 RS)
Com Bearing	10222130	\$11.85	(sub 6206 2 RS)
Springs #	11840500	\$5.25	Requires 8 per motor
Brushes #	10345068	\$67.50	Requires 2 groups per motor
Brush Holder	10440300	\$458.25	
CE Head	10608259	\$562.50	
DE Head	10908309	\$675.00	
Field Coil Set	11133001	\$573.75	
Armature	3002308309FN	\$1,271.25	
Mounting Pattern*	T400STS	\$225.00	Tailshaft housing-Turbo 400 transmission
Slip Yoke*	1350SYA	\$250.00	1350 slip yoke-Turbo 400 transmission
DE Length	4.883"		
DE Diameter	1.370"		
DE Keyway	32-tooth		Involute Spline
DE Pilot	4.860" Dia		
DE Mounting Hole	03/08/16		
CE Length	2.414"		
CE Diameter	1.1250"		
CE Mounting Hole	¼" – 20		
Case Steel	1020 or similar		
Shaft Steel	1144 stress proof		Hardened

* Optional items purchased separately



Quality components
make a
quality motor!

